



Adhesive Double Door Lock


Easy Installation Guide

Important:

Qdos wants to keep your children safe and for that we need you to do your part by carefully reading and following the instructions below.

For installation videos and FAQ go to: QdosSafety.com

Parts List:

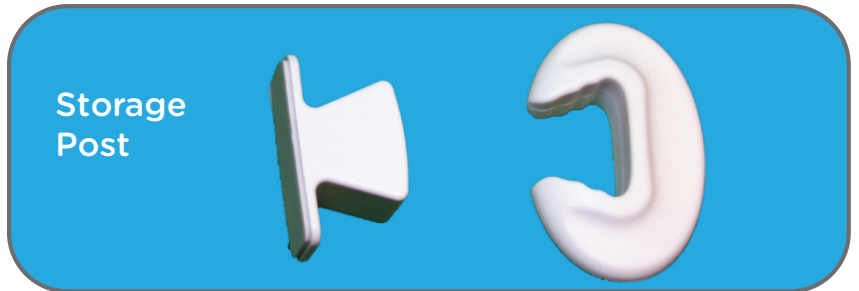

For 1.25" to 1.75" (30-45 mm) thick doors.

WARNING

- Excessive force on the door while Finger Slam Guard is clamped on door might cause damage to door and hinges.

Use Positions



Top of Door

- Clamp Finger Slam Guard on top of door about 12" (30 cm) in from front edge.
- This is the preferred location as it creates a wide safe opening.



Side of Door

- Clamp Finger Door Slam Protector on the side of door at approximately eye height.
- Never position within child's reach.

Storage when not in use



To help keep the Finger Slam Guard handy and out of reach for children when not in use we have included an Adhesive Storage Post. Decide the best location for storing the Finger Slam Guard, we suggest the door frame or the back of the door.



To mount the Storage Post, remove adhesive protective liner then press firmly into place for 30 seconds.

To Permanently Remove Storage Post



Use a rounded knife and carefully pry behind a corner of the Storage Post until the tape tears.

For remaining tape residue, use a finger to simply rub it away. If any residue still remains, use a cleaner that will not damage the surface you are removing the residue from. There is no way to test all possible surfaces SecureHold Adhesive will be applied to; please use caution when removing to avoid damaging the surface. SecureHold adhesive may cause damage to some surfaces.